

EDGELESS SERIES


In-Wall & Center Speakers

A seamless blend of high-end audio & interior design

Model:
EWS-600

Model:
EWS-800

Model:
EWS-530C

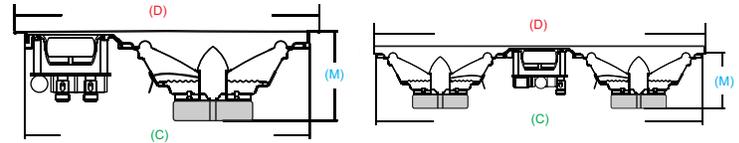

EWS-600 EWS-800 EWS-530C

(D) H x W	11 15/16" (303mm) x 8 9/16" (248mm)	13 3/4" (349mm) x 9 3/4" (248mm)	9 3/4" (248mm) x 13 3/4" (349mm)
(C) Cut Out Hole	10 7/8" (275mm) x 7 7/16" (188mm)	12 7/8" (326mm) x 8 13/16" (224mm)	12 7/8" (326mm) x 8 13/16" (224mm)
(M) Mounting Depth	3 9/16" (90mm)	4 1/16" (103mm)	3 3/16" (85mm)

OBJECTIVE

The Edgeless Series of In-Wall & In-Ceiling Speakers is one of Earthquake Sound's most valued speaker lines. Designed with aesthetics (WAF-wife approval factor) and sound quality in mind, these speakers seamlessly blend into their surrounding as they provide a lifetime of durability and high-end performance.

The goal here is to seamlessly blend into any interior decor and to reproduce the sound of a concert hall or the sound of a movie sound track in any room with the EDGELESS speakers.

The EDGELESS speakers deliver deep, natural bass from the design of their advanced cone and surround. Superb sonic accuracy is guaranteed by the utilization of stiff kevlar in the woofer and silk in the tweeters. Additionally, you can customize the sound of the speakers with +/- 3dB adjustment switches that optimize the sound to the acoustics of the room and end user's own personal preference.

INTENDED USE

- ✓ Architects Custom Projects / high-end designs
- ✓ Contractors, Custom Installers and Retailers
- ✓ Kitchens, Hall-ways, Bathrooms, Atriums
- ✓ New Construction & Retrofit Applications
- ✓ Home Theater & 2-Channel/Music Systems
- ✓ Can Be Used in Both Boats and RV's

SPECIAL FEATURES & HIGHLIGHTS

- Frameless design for reduced visibility/seamless blend
- 1" (25mm) silk dome NEO swivel-action tweeters
- Low mass stiff kevlar cone bodies for a very smooth & accurate output with attention to details
- ± 3dB bass and treble controls (additional ± 3dB Mid on EWS-530C)
- Elaborate crossover networks with highest quality capacitors and inductors. 12dB/Octave with polyswitch protection.
- Easy Turn-N-Lock™ installation mechanism for safe, time efficient and professional installation.
- Gold plated, spring loaded terminals
- Magnetically attached, paintable grilles

SPECIFICATIONS

	EWS-600	EWS-800	EWS-530C
Tweeter / Cone	1" (25mm) silk dome NEO swivel-action tweeter Low mass stiff kevlar cone body		
Power Handling	300 Watts	500 Watts	350 Watts
Frequency Response	40Hz - 20kHz	30Hz - 20kHz	40Hz - 20kHz
Woofer	6-1/2"	8"	Two 5 1/4" + One 3"
Impedance	8-Ohm	8-Ohm	8-Ohm
MSRP	\$399.00/pr	\$459.00/pr	\$325.00/pc